

MISCELLANEOUS

CABINET/CLOSET HARDWARE


CAL-ROYAL

CR-DIFP218

- US3, 5, 15, 15A, 26, 26D
 Drive in
 Finger Pull
 2-1/8" Dia.
 No nails



DON-JO



DJ-1590

- Finishes:** 605, 625
Material: Cast.

IVES

- 4 per bag.
 Sold by the bag

Finger Pull

- Ideal for use on sliding doors.
- Easy installation.
- Made from wrought brass.
- Conforms to design requirements of ANSI/BHMA A156.9 B22201 and A156.14 D2781.
- Dimensions: Inside Cup Diameter: 3/4"; Overall Diameter: 1"; Depth: 5/16"



Stock No. (Specify Finish)

IV-218BB

- Finishes:** 3, 15, 15A, 26

Flush Pull

- Low profile makes this pull ideal for louvered, bi-folding or wardrobe doors.
- Extra deep recess and reverse tapered grip provide for ease of pulling and gripping.
- Made from wrought brass.
- Conforms to design requirements of ANSI/BHMA A156.9 B22201 and A156.14 D2781.
- Dimensions: 1-5/16" H x 3-1/8" W x 7/16" D.

IVES



Stock No. (Specify Finish)

IV-22B

- Finishes:** 3, 10B, 15, 15A, 26, 26D

Flush Pull

- Ideal for use on sliding doors.
- Built-in prong design eliminates the need for screws or brads and facilitates installation.
- Packed with two escutcheon pins for added holding power.
- Made from wrought brass.
- Conforms to design requirements of ANSI/BHMA A156.9 B22201 and A156.14 D2781.
- Dimensions: Inside Cup Diameter: 2-1/8"; Overall Diameter: 2-7/16"; Depth: 7/16"

IVES



Stock No. (Specify Finish)

IV-221B

- Finishes:** 3, 5, 10B, 15, 15A, 26, 26D

Flush Pull

- Low profile makes this pull ideal for louvered, bi-folding or wardrobe doors.
- Reverse tapered grip provide for ease of pulling.
- Made from cast brass.
- Conforms to design requirements of ANSI/BHMA A156.9 B12201 and A156.14 D1781.
- Dimensions: 3-1/8" H x 1-5/8" W x 7/16" D.

IVES




Stock No. (Specify Finish)

IV-222B

- Finishes:** 3, 5, 10B, 15, 15A, 26, 26D

MISCELLANEOUS

CABINET/CLOSET HARDWARE



Stock No. (Specify Finish)
IV-223B

Finishes: 3, 5, 10B, 15, 15A, 26, 26D

Flush Pull

- Low profile makes this pull ideal for louvered, bi-folding or wardrobe doors.
- Made from wrought brass.
- Conforms to design requirements of ANSI/BHMA A156.9 B22201 and A156.14 D2781.
- Dimensions: 3-9/16" H x 1-5/16" W x 1/2" D

Stock No. (Specify Finish)
IV-227B

Finishes: 3, 5, 10B, 15, 15A, 26, 26D

Flush Pull

- Contoured for ease of pulling.
- Extra deep well.
- Deluxe quality.
- Made from wrought brass.
- Conforms to design requirements of ANSI/BHMA A156.9 B22201 and A156.14 D2781.
- Dimensions: 3-5/8" H x 1-3/4" W x 9/16" D

Elbow Catch

- Ideal for use on the inactive leaf of a pair of cabinet doors.
- Surface applied, making installation simple.
- Made from cast brass or cast aluminum.
- Conforms to design requirements of ANSI/BHMA A156.9.
- Dimensions:
Plate: 1-3/8" x 5/8"
Strike: 13/16" x 5/8"



Stock No. (Specify Finish)

IV-2A Aluminum

Finishes: 3, 10, 14, 92

IV-2MB Brass

Finishes: 3

Round Knob

- Two diameters stocked: 1" and 1-1/4".
- Made from wrought brass.
- Furnished with a No. 8-32 machine screw, 1-1/8" long.
- Conforms to ANSI/BHMA A156.9 B22131.
- | Model & Diameter | Projection |
|------------------|------------|
| 521 1" | 15/16" |
| 521 1 1/4" | 1-1/8" |





Stock No. (Specify Finish)

IV-521B * 1" 1" Diameter

IV-521B * 1-1/4" 1-1/4" Diameter

*Finishes: 3, 5, 10B, 15, 15A, 26, 26D

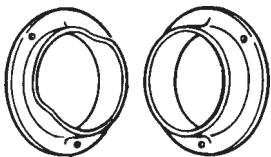

Stock No. (Specify Finish)

IV-585F3

Finishes: 3

Closet Pole Sockets

- Flange design prevents accidental knock out of pole.
- Made from wrought steel.
- Accommodates pole or pipe with outside diameter of 1-3/8".
- Packed in pairs.

Stock No. (Specify Finish)

IV-586P

Finishes: White Plastic

Closet Pole Sockets



- Made from a heavy duty plastic for long life and extra strength.
- Single screw mounting.
- Accommodates pole or pipe with outside diameter of 1-3/8".

©ZIPF LOCK COMPANY

See page 427 for Cal Royal, Don Jo, Ives finish descriptions.

MISCELLANEOUS

Folding Door Lock




ST-1064 US-3

Positive locking action. Easy to mount. Only one 3/4" hole needed in one door. Strike is mounted on back side of opposite panel or on striking jamb. Key may be removed in either locked or unlocked position. Two keys per lock. Fits doors from 3/4" to 1-3/8" thick.

—STERLING—

Sliding Door Lock

US-3 Polished Brass
US-26D Satin Chrome

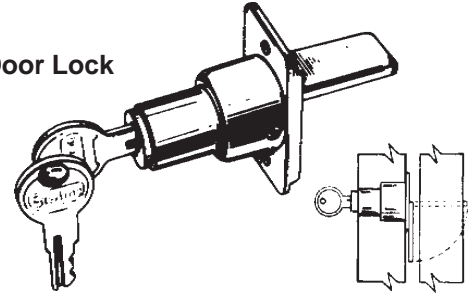

ST-1068 US-3, 26D

A truly quality wardrobe lock. Patented, positive-action design with lock cylinder geared directly to the tongue. One half turn of key locks or unlocks. Fits doors 3/4" to 1-3/4" thick. Two keys per lock.

CRASH STOP (CHAIN)

CAL-ROYAL



CR-HDCDV48 26D

Adjustable Chain Door Stop (20" to 30-1/2")
(Ives #115)




Stock No. IV-CS115-25 26D
Length 25-1/2"
Finishes: 26D

Extra Heavy Duty Crash Stop

- Specially designed for full-size exterior doors.
- Tear resistant, grey vinyl cover.
- Heavy duty compression spring assembled to both ends of chain and end brackets.
- Packed with sheet metal screws.
- Cast Brass brackets with solid, welded steel chain.
- Meets ANSI/BHMA A156.16, L12231, (Grade 1).
- Length: 25-1/2"; For 36" wide doors;
Bracket size: 1-9/16" X 1-9/16"

DOOR BOLTS

CAL-ROYAL




Stock No.	Length	Finish
CR-SB873	3" Bolt	US-3, 15, 15A, 26
CR-SB874	4" Bolt	US-3, 5, 10B, 15, 15A, 26
CR-SB876	6" Bolt	US-3, 5, 10B, 15, 15A, 26
CR-SB8712	12" Bolt	US-3, 5, 10B, 15, 15A, 26

Brass Surface Bolt
(Poly Packed w/screws)


CR-ESSBUL-50

US26D
UL Listed 8" Heavy
Duty Surface Bolt.
(Ives #453)
Bolt Throw: 1-3/16"
Width: 1"
Projection: 1-5/8"



COMBI-BOLT

10,000
Possible
Combinations

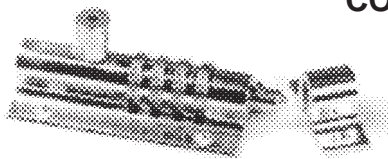

Stock No.
CB-2000 BLACK
Black finish

- Great for gates and sheds.
- 10,000 possible combinations.
- Easily set your combination anytime.
- Permanent screw mounts.
- Heavy duty solid metal bolt & construction.
- Functionality/simplicity of sliding bolt while providing additional security.
- Ideal for outdoor use, totally rustproof.
- Easy to install in variety of applications.
- Easily converts from right hand to left hand doors.

©ZIPF LOCK COMPANY