

ZIPF LOCK COMPANY


DOOR CLOSERS

4041 SERIES DOOR CLOSER

LCN®

4041 SUPER SMOOTH® SERIES / non handed non sized for interior or exterior use.

FEATURES: •Fast Power adjust—a revolutionary visual indicator for spring power adjustment •Full rack and pinion hydraulic action •Forged steel main arm •Ten million cycles •All weather fluid •10 year warranty •Cast iron cylinder •Hydraulic backcheck •Non handed plastic cover •UL & ULC Listed •Meets ADA requirements •ANSI A156.4 Grade 1 •Non sized adjustable from size 1 thru size 6 (set to size 3).

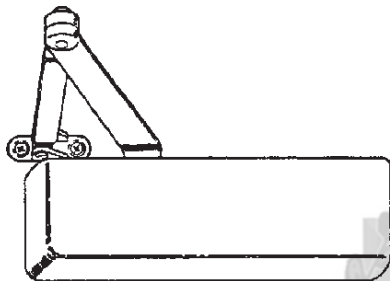


Stock#
LCN-P4041

Maximum Door Width
EXTERIOR 24" to 48"
INTERIOR 24" to 60"

FINISHES:
ALUM
DARK BRONZE

•Specify Arm: **REG** = Regular w/62PA
H = Hold open w/62PA
H-CUSH = Hold open, Cush-N-Stop
DEL = Delayed action closer. Adjustable delay that holds door open from 15 seconds to 1 minute.


REDUCED OPENING FORCE 4041 CLOSERS—CAUTION! Any manual door closer, including those certified by BHMA to conform to ANSI Standard A156.4, that is selected, installed and adjusted based on ADA or other reduced opening force requirements may not provide sufficient power to reliably close and latch a door.

	DOOR WIDTH	36"	42"	48"
	8.5*lbs	4041	4041	4041
5.0*lbs	4041	4041	4041	

*Maximum opening force.

CUSH-N-STOP® ARMS / Closer, stop, holder in one arm.

FEATURES: Eliminates the need for separate stop/holder •Protects against abusive traffic and wind conditions •Hold open optional •10 year warranty •U.L. Listed •ANSI A156.4 Grade 1.

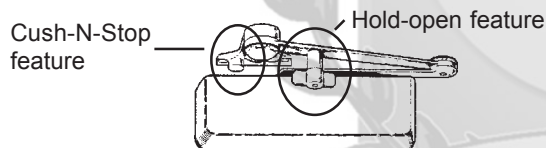

Available For:
LCN-P1461 Series
LCN-4111 Series

•Dead stop (and hold open) is template located at 85°, 90°, 100° or 110°. •Backcheck cushions opening swing prior to dead stop •With hold open "on" door may be pushed into and out of hold open position.

FINISHES—

STANDARD PAINTED FINISHES

ALUM- Aluminum Lacquer, BHMA No. 689

STAT- Statuary Bronze Lacquer, BHMA No. 690

FINISH TO MATCH ARCHITECTURAL ALUMINUM HARDCOAT


DARK BRONZE- Dark Bronze Hard Coat, BHMA No. 695

NEED A SPECIAL CLOSER NOT LISTED HERE??

If you don't see the LCN closer that you want...PLEASE give us a call. In most cases we can special order the LCN closer at competitive prices and quick delivery. Call us for price and delivery before buying somewhere else.

DETERMINING HANDING—

Some door closers are handed. When approaching a door from the push side, if hinged on the left, it is a left hand door; if on the right it is a right hand door. For purposes of handing door closers, left hand and right hand reverse bevel are identical. Also, right hand and left hand reverse bevel are identical. The hand of the closer is the same as the hand of the door except...the hand of a closer on a corner bracket is opposite the hand of the door.

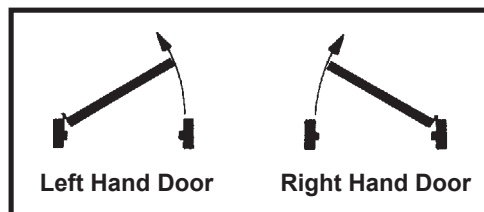

300v1
 (PL-23)

”Your warehouse around the corner”

ZIPF LOCK COMPANY


DOOR CLOSERS

4011 SERIES DOOR CLOSER

LCN®

4011 SMOOTHIE® SERIES / non sized for interior or exterior use. (For Hinge side of doors only)

FEATURES: •Fast Power adjust—a revolutionary visual indicator for spring power adjustment •Full rack and pinion hydraulic action •Forged steel main arm •Ten million cycles •All weather fluid •10 year warranty •Cast iron cylinder •Hydraulic backcheck •Non handed plastic cover •UL & ULC Listed •Meets ADA requirements •ANSI A156.4 Grade 1 •Non sized adjustable from size 1 thru size 5 (set to size 3).

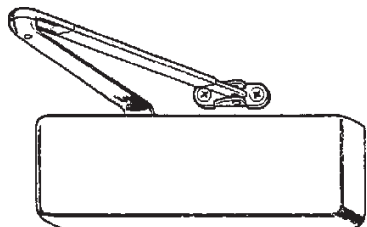

Stock#
LCN-4011

Maximum Door Width
EXTERIOR 24" to 42"
INTERIOR 24" to 54"

•Specify Arm: **REG** = Regular
H90* = Hold open(Up to 140°)

•SPECIFY HAND: **RH** or **LH**.
See **BELOW** for handing.

LCN-4011 mounts on hinge face of door. For out swinging exterior doors use LCN-4111 below.

*H90 Discontinued-Call for closeout prices

FINISHES:
ALUM or **DARK BRONZE**

REDUCED OPENING FORCE 4011 CLOSERS—CAUTION! Any manual door closer, including those certified by BHMA to conform to ANSI Standard A156.4, that is selected, installed and adjusted based on ADA or other reduced opening force requirements may not provide sufficient power to reliably close and latch a door.

	DOOR WIDTH	36"	42"	48"
	8.5*lbs	4011	4011	4011
	5.0*lbs	4011	4011	4011

*Maximum opening force.

4111 SERIES DOOR CLOSER

4111 SMOOTHIE® SERIES / non sized for interior or exterior use. (For stop side of doors only)

FEATURES: •Fast Power adjust—a revolutionary visual indicator for spring power adjustment •Full rack and pinion hydraulic action •Forged steel main arm •Ten million cycles •All weather fluid •10 year warranty •Cast iron cylinder •Hydraulic backcheck •Non handed plastic cover •UL & ULC Listed •Meets ADA requirements •ANSI A156.4 Grade 1 •Non sized adjustable from size 1 thru size 5 (set to size 3).



Stock#
LCN-4111

Maximum Door Width
EXTERIOR 28" to 42"
INTERIOR 28" to 54"

•Specify Arm: **REG** = Regular (EDA)
CUSH = Cush-N-Stop
H = Hold open (EDA)
H-CUSH = Hold open, Cush-N-Stop

•SPECIFY HAND: **RH** or **LH**.
See **BELOW** for handing.

LCN-4111 mounts on stop face (push side) of door. With door closed, arm folds to position parallel to door.

FINISHES:
ALUM or
DARK BRONZE

REDUCED OPENING FORCE 4111 CLOSERS—CAUTION! Any manual door closer, including those certified by BHMA to conform to ANSI Standard A156.4, that is selected, installed and adjusted based on ADA or other reduced opening force requirements may not provide sufficient power to reliably close and latch a door.

	DOOR WIDTH	36"	42"	48"
	8.5*lbs	4111	4111	4111
	5.0*lbs	4111	4111	4111

*Maximum opening force.

FINISHES—

STANDARD PAINTED FINISHES

ALUM-Aluminum Lacquer, BHMA No. 689


STAT-Statuary Bronze Lacquer, BHMA No. 690

FINISH TO MATCH ARCHITECTURAL ALUMINUM HARDCOAT

DARK BRONZE- Dark Bronze Hard Coat, BHMA No. 695

DETERMINING HANDING—

Some door closers are handed. When approaching a door from the push side, if hinged on the left, it is a left hand door; if on the right it is a right hand door. For purposes of handing door closers, left hand and right hand reverse bevel are identical. Also, right hand and left hand reverse bevel are identical. The hand of the closer is the same as the hand of the door except...the hand of a closer on a corner bracket is opposite the hand of the door.

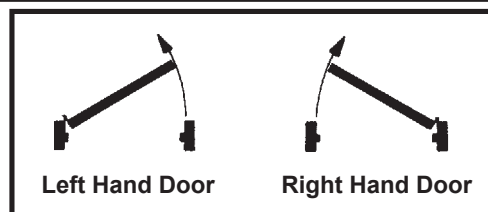

©ZIPF LOCK COMPANY

301v1
(PL-23)

”Your warehouse around the corner”

ZIPF LOCK COMPANY


DOOR CLOSERS

1370 SERIES DOOR CLOSER

LCN®

1370 QUEST® SERIES / non handed, non sized for interior or exterior use.


FEATURES: •Non-handed, mounts three different ways; 1.Hinge side, 2. Top jamb, 3. Parallel arm •PA shoe included •Adjustable hydraulic backcheck cushions opening swing prior to 90° •Full rack and pinion hydraulic action •Hold-open arms permit doors to be held at any point up to 180° •Drop plates and adaptor plates available to meet special conditions (special orders) •Non Sized adjustable from 1 thru 5 (set to size 3) •PA Mount adjustable from size 1-4 •Mounts on narrow 1-3/4" head frames •TB-Has thru bolts & machine screws •10 year warranty •UL & ULC without hold open arm •ANSI A156.4 Grade 1.

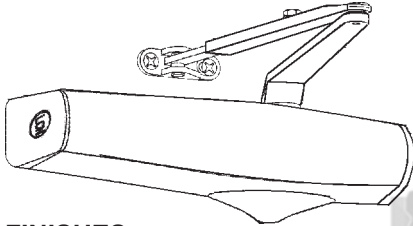

FINISHES:
ALUM or DARK BRONZE

Stock No.	Description
LCN-1371 REG TB	Regular Arm
LCN-1371H TB	Hold Open

Recommended range of door width:
Exterior: 26" to 42"; Interior: 26" to 54".
Minimum door width: 26".

	DOOR WIDTH	36"	42"	48"
	8.5*lbs	1371	1371	1371
	5.0*lbs	1371	1371	1371

*Maximum opening force.

REDUCED OPENING FORCE 1370 CLOSERS—


CAUTION! Any manual door closer, including those certified by BHMA to conform to ANSI Standard A156.4, that is selected, installed and adjusted based on ADA or other reduced opening force requirements may not provide sufficient power to reliably close and latch a door.

Specify if PA Bracket needed.

1461 SERIES DOOR CLOSER

1461 SUPER STOCK® SERIES / non handed, non sized for interior or exterior use.

FEATURES: •Can be mounted three different ways: 1. Hinge side, 2. Top jamb, 3. Parallel arm •PA shoe included •Non handed, non sized with spring power adjustable from size 1 through 6 (set to size 3) •Adjustable hydraulic backcheck provides cushioning of opening swing arm prior to 90° •Forged steel main arm •Cast iron cylinder •Full rack and pinion hydraulic action •Joints in arm and shoe adapt to uneven trim •TB-Has thru bolts & machine screws •Slim Line plastic cover •10 year warranty •UL & ULC without hold open arm •ANSI A156.4 Grade 1.

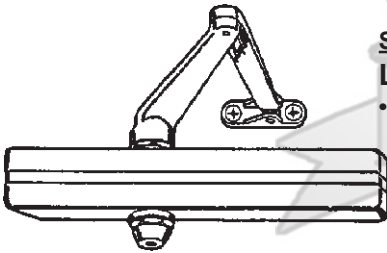


Stock#	Maximum Door Width	
	EXTERIOR	INTERIOR
LCN-P1461	24" to 48"	24" to 60"

•Specify Arm: REG = Regular w/62PA
H = Hold open w/62PA

REDUCED OPENING FORCE 1461 CLOSERS—

CAUTION! Any manual door closer, including those certified by BHMA to conform to ANSI Standard A156.4, that is selected, installed and adjusted based on ADA or other reduced opening force requirements may not provide sufficient power to reliably close and latch a door.


	DOOR WIDTH	36"	42"	48"
	8.5*lbs	1461	1461	1461
	5.0*lbs	1461	1461	1461

*Maximum opening force.

FINISHES: ALUM or DARK BRONZE

CUSH-N-STOP® ARMS / Closer, stop, holder in one arm.

FEATURES: Eliminates the need for separate stop/holder •Protects against abusive traffic and wind conditions •Hold open optional •10 year warranty •ANSI A156.4 Grade 1.

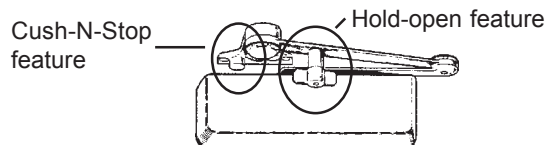

Available For:
LCN-P1461 Series (Being discontinued)
LCN-4111 Series

•Dead stop (and hold open) is template located at 85°, 90°, 100° or 110°. •Backcheck cushions opening swing prior to dead stop •With hold open "on" door may be pushed into and out of hold open position.

©ZIPF LOCK COMPANY

302
(PL-23)

"Your warehouse around the corner"

ZIPF LOCK COMPANY

DOOR CLOSERS

DOOR CLOSER MOUNTING HOLE SPACINGS (NOT TO SCALE)	
CAL-ROYAL 300 SERIES 	CAL-ROYAL 400 SERIES
CAL-ROYAL 700 SERIES 	CAL-ROYAL 900 SERIES
CAL-ROYAL 441 SERIES 	CAL-ROYAL 801 SERIES
CORBIN/RUSSWIN RE-2210, RE-3210 	CORBIN/RUSSWIN RE-4612, 13, 14, 15
KWIKSET KW-962, 63, 64, 65 	LCN 1371 SERIES
LCN P1461 SERIES 	LCN 4011
LCN 4111 	LCN P4041

Specifications subject to change without notice.

303v1
(PL-23)

”Your warehouse around the corner”