

# ZIPF LOCK COMPANY

## HINGES

### REINFORCING PIVOT HINGE


#### Full Surface

(1 per box)



DISCONTINUED -  
CALL FOR CLOSEOUT  
PRICES

Stock No.	For use with Butt Hinge Width	Projection Centerline of Pivot to Face of Door	Door Thickness
HH-251	3-1/2"	5/8"	1-3/8"
HH-252	4"	1/2"	1-3/4"
HH-253	4-1/2"	3/4"	1-3/4"



Handing must be specified (RH,LH).

Screw Pack Information: 8 ea. 3/4 X 1/4-20 F.H.M.S.; 8 ea. 1-1/4 X 14 F.H.S.M.S.; 2 ea. Sleeve Bolts #263 for 1-3/4" doors; 8 ea. Molly Jack Nuts #265.

**NOTES:**

- 1) Full surface pivots allow for 1/8" standard distance from face of door to face of frame. Shims may be used where conditions warrant.
- 2) Projection dimension is based on standard 1/4" backset of butt hinge on door. Shims may be used where conditions warrant.

**IF YOU NEED SOME HAGER AND DON'T SEE IT HERE...  
GIVE US A CALL.**

*We can special order the item and at competitive prices and fast delivery!!*





### 1900 SERIES REINFORCING PIVOT

THE ONLY SURFACE-MOUNTED REINFORCER HINGE FOR ON-SITE INSTALLATION

**APPLICATION**—The reinforcing pivot hinge from Markar products is a reinforcement solution. The reinforcer adds support at the top of the door where most stress is concentrated with conventional butt hinge systems. The reinforcer can easily be installed by maintenance personnel, and comes with necessary fasteners.

**FEATURES**—

- Made of 3/16" cadmium plated steel
- Oilite Bronze Bearing
- Hardened steel pin of pivot
- Left or right hand models
- Full surface, half surface and full mortise models (special order)
- All fasteners included
- Cost effective reinforcing solution
- Insures longer door operating life
- Easy to install
- Surface applied - no special preparation
- Restores trouble - free operation
- Adapts to any door
- Acceptable for use on fire doors

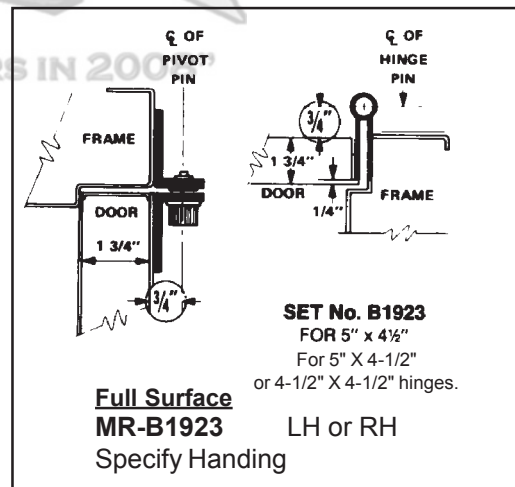

**FINISH: US2G** — Zinc Plated  
7 ga. (.188" thick) cold rolled steel

©ZIPF LOCK COMPANY

**372** v1  
(PL-33)

"Your warehouse around the corner"